

# Intellian IM8

# INTELLIGENT MEDIATOR

Advanced Antenna Management Solution



### FEATURES

#### VSAT ANTENNA MEDIATION

The Intelligent Mediator IM8 enables a smart approach to blockage mitigation, connection resiliency, antenna diversity and failure reduction. Up to 8 antennas can be managed at once even non Intellian antennas.

# ORCHESTRA - ADVANCED MANAGEMENT SOLUTION

The Intelligent Mediator IM8 provides very smart antenna management solution when integrated with the MES (Mediation Edge Server) Automated mediation is possible based on policy and condition, Asset Management and a dashboard for system status are available.

## DYNAMIC MODEM PORT ALLOCATION

Any modem up to 8 regardless of frequency band works on any port. All ports are available to any commercial band (C-/Ku-/Ka-band) including multi-band support modem. It provides a very simple solution to link any antenna to any modem installed on the ship.

#### MEO SERVICE SUPPORT

The Intelligent Mediator IM8 is a perfect solution for the O3b MEO service. It supports Break-Before-Make and Make- Before-Break handover with no loss of data and no dropped calls. Constant antenna role changes makes seamless communication during MEO operation.

# MULTI-BANDS AND MULTI-MODES OPERATIONS

The Intelligent Mediator IM8 suggests several kinds of operation modes to utilize bandwidth in maximum. GEO only for blockage mitigation, Hybrid NGSO/GSO operations focusing high bandwidth with reliability.



# IM8 Advanced Antenna Management Solution

#### TECHNICAL SPECIFICATIONS

431mm X 430mm X 88mm Size (WxDxH)

(16.97" x 16.93" x 3.46")

9 kg (lbs) Weight

• 1x RJ45 on the front side **Ethernet Port** 

• 4x RJ45 on the rear side

• 8x SMA ports for ACU TX

• 8x SMA ports for ACU RX **RF Connectors** • 8x SMA ports for Modem TX

• 9x SMA ports for Modem RX

Gyrocompass Interface NMEA 2000, NMEA 0183

Modem Interface RS-232C / I/O port / Ethernet

**BUC Interface** RS232C

PC Serial Interface RS232C (57600 bps, 8N1)

Tx: 8x8 Matrix Switch Channel Rx: 8x9 Matrix Switch

Connectors 50 Ω (SMA type Female)

950 MHz ~ 2150 MHz Frequency Range


Power Source 110/220V AC

**Power Consumption** 100 W Typ.


#### KEY FEATURE

- RF Switch Matrix Management (8 x Antenna / 8 x Modem)
- Configurable Modem Ports
- Mix & Match Different Antenna Models
- Ready for Orchestra
- Aptus Mediator UI/UX

#### SYSTEM DIMENSION



## SYSTEM DIAGRAM

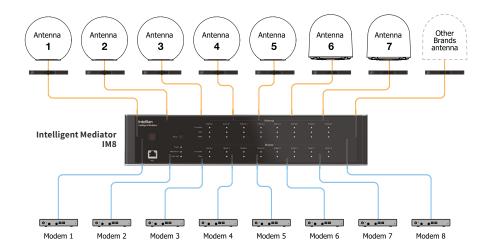

#### Global HQ

Innovation Center Intellian Technologies, Inc. T +82 31 379 1000 F +82 31 377 6185

#### **APAC**

Intellian Technologies, Inc. T+82 2 511 2244 F+82 2 511 2235

#### **Americas**

Intellian Technologies USA, Inc. T+19497274498 F+19492714183 Toll Free +1 888-201-9223

#### **EMEA**

Rotterdam Intellian B.V. T+31108208655 F+31108208656